Our 29th Near





Architectural Resource Center

"A Veteran Owned Business"

Traditional Hardware for Windows and Doors



We make windows work!

THE HARDWARE EXPERTS


For Customer Service Call 1-800-370-8808 8AM to 5PM EST

Traditional Hardware for Wood Windows



P. O. Box 217 1-800-370-8808 557 Old Turnpike Road Toll Free FAX 1-866-370-0260 Northwood, NH 03261 www.aresource.com

"A Veteran Owned Business"

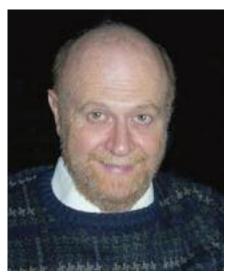

Bob Markarian, President



A Message from the President

Whether large or small, your projects are of paramount importance to us. Architectural Resource Center (ARC) is here to help you and to provide the finest hardware available in order to meet your standards. We pride ourselves on customer service and the quality of our hardware, and we are proud to be a part of your projects.

For over twenty-nine years we have supplied hardware to many of America's most prestigious buildings, as well as to the finest craftsman of custom wood windows. We've enjoyed taking part in projects involving historic structures, government buildings, halls of learning, centers of commerce, and of course private residences. ARC items are designed and manufactured in the best hardware traditions of the past. Many ARC products have benefitted from state of the art developments in engineering, metallurgy, and manufacturing processes.

At the Architectural Resource Center we focus on the details of your building so you can be confident your windows and doors will work smoothly for generations to come. We strive to deliver the best product, on time, and at the best price. We hope you will allow us to work with you and join the thousands of satisfied customers who repeatedly come to us with their project needs.

Sincerely,

B06



Table of Contents

We are your Architectural Resource Center

If you don't find what you are looking for in our catalog, call us, we have additional resources to fit your needs.

Products Index by Product Number	i - ii
Double Hung Window Hardware	
Our Best Solid Brass Pulleys and Our Economy Grade Brass Pulleys	1 - 2
Sash Chains, Cords and Weights	5, 6, 7
Chain, Cord and Window Accessories	8
Finger Lifts, Mortise Lifts, Projected Lifts	9 - 12
Sweep Locks, Pole Locks, Quadrant Locks, Security Locks, Spring Locks	13 - 17
Pole Operated Window Hardware	18
Double Hung Window Accessories	19
Casement Window Hardware	20 - 21
Transom Window Hardware	22
Weather Strip	
Metal Weather Strip	23 - 26
Non-Metal Weather Strip	27 - 33
Weather Strip Accessories	34
Screws	35
Door Hardware	
Surface and Flush Bolts	36
Thresholds	38 - 46
Hinges	47
Custom Hardware	
Custom Castings	48
Finish Samples	49
How We Do Business	50

For help with your order please call your Customer Service Representative at,

1-800-370-8808

Monday - Friday 8AM to 5PM EST

Join the ARC email list to get news and updates.

i

Product List

By Product Number

Product Number	Page	Product Number	Page	Product Number	Page
0001	17	107A	41	264AV	39
066	22	178A	37	265AV	39
10	13	18	18	266AV	38
10C	23	1802	46	267AV, DV	38
1001	12	1803	46	268A	41
101A, D	14	1804	46	27	12
102A, B, D, G	14, 45	181A	37	27B	34
		1902	46	3	9, 17
104	16	2P	23, 24	300C	24
107	10	2107	12	301	9
11AP	40	2115	35	3016	21
11C	23	2116	36	3017	20
117	18	2136	12	3018	15
117H	18	2137	12	302C	24
117P	18	2145	35	3021	10
118	18	2148	35	3022	11
12	19	2165	10	303C	24
12AP	40	2168	35	304C	24
122B	25	22AV, DV, GV	43	3061	15
123B	25	222	10	3063	20
124B	25	223AP, DP, GP	40		
125B	25	241AP	40		
126B	25	242	40		
13AV	43	25B	25	33	8
14AV	43	2501	46	33AE	41
16AB	26	2504	46	330	9
16AZ	26	258AN, DN	38	34A	44
162A, G	42	259AV, DV	38	346	22
165A, D, G	42	2602	46	382AV, DV	37
166A	42	2603	46	4	17
167A, B, G	42	261AV, DV	38	4AV, DV, GV	43
169A, B, G	41	262AV	38	4C	23
		263BV	39	4P	23, 24

Product List By Product Number

Product Number	Page	Product Number	Page	Product Number	Page
4012	13, 16	81	8	Sash Cord	6
4217	13	82		Screws	34
4219	9	86P	44	SP175BBRE	2
4220	13	9	13	SP225BBRE	2
4221	14, 22	9C	23	Tape Balances	3, 4
4222	11	9P	23, 24	TC01	22
4225	11	92AE, AES	44	TC02	22
4281	21	97AP, AS	44	TFS150	33
44	8	99AP, DP, GP	40	TFS250	33
44AV, DV, GV	43	9955	14, 22	TS150	33
5AP	40	AP412	28	TS250	33
50A	42	AP415	28	WB1	19
5032	16	AP425	28	WB2	19
5033	16	Bronze Screen 19		Weights	7
5034	16			Wire Clips	8
5114	1	Dust Plugs	34	WS03	32
53A, B	42	Finish Samples 49		WS04	32
57A, B	42	Hinges 46		WS06	32
6	19	M1 23, 24		WS32	32
6AP	40	M1M2	M1M2 23		32
6114	1	M2	23, 24	WS34	32
6255	20	M3	23, 24	WS35	32
6259	20	M3M4	23	WS36	32
7C	23	M4	24, 32		
7P	23, 24	Nails	34	Ar pile Chie	
71	21	PF109	28	AARO	
7114	1	Q200	27		
77A	37	QDS375	29	Source Ceri	
78A, B, D	37	QDS500	30	If you don't account	hot vo::
79A, D, G	37	QDS650	31	— If you don't see w	
8	8	QEZ260	27	— need in our cat	
80	14, 22	QEZ320	27	call us and we wand find it for y	_
80A	37	Sash Chain	5		you

Solid Brass Sash Pulleys

Our Best Pulleys - Guaranteed for LIFE

Commercial Quality, Forged Brass with Sealed Ball Bearings, and a Steel Pin. CNC machined and available with either Round or Square Ends.



Model 5114

Solid Brass Pulley

Length of Faceplate: 3 3/4" to 5" Width of Faceplate: 1" to 1 1/8"

Depth: 1 1/2"

Wheel Diameter: 1 11/16"

Model 6114

Solid Brass Pulley

Length of Faceplate: 4 1/2" to 6" Width of Faceplate: 1" to 1 5/16"

Depth: 1 3/4"

Wheel Diameter: 1 7/8"

Model 7114

Solid Brass Pulley

Length of Faceplate: 5 1/2" to 6 7/8" Width of Faceplate: 1 1/8" to 1 3/8"

Depth: 2 9/16"

Wheel Diameter: 3 3/16"

*Depth = Distance from the front of the faceplate to dropline of chain or cord

Our pulleys are:

*independently tested to a breaking strength of 7,000 lbs.

**machine to any size on our CNC machine, and

***GUARANTEED FOR LIFE

"A Veteran Owned Business"

1-800-370-8808



Brass Sash Pulleys

Our Economy Grade Pulleys







Colors: US3 US3A US10B US15



Pulleys ship with Slotted Screws and Phillips Head Screws



Model SP225BBRE

Standard Grade Solid Brass Pulley

Sheet metal housing with solid brass wheel and stamped faceplate with ball bearings.
Round Ends

Length of Faceplate: 5" Width of Faceplate: 1 1/4"

Depth: 1 1/2"

Wheel Diameter: 1 11/16"

Model SP175BBRE

Standard Grade Brass and Sheet Metal Pulley

Sheet metal housing with solid brass wheel and stamped faceplate with ball bearings.

Round Ends

Length of Faceplate: 4 5/8" Width of Faceplate: 1"

Depth: 1 1/4"

Wheel Diameter: 1 3/8"

"A Veteran Owned Business"

1-800-370-8808

© Copyright 2022




Tape Balances

Tape or spring balances are worth knowing about because these clever devices are not only historically appropriate for retrofitting old windows, but they're also practical for solving some common, modern old-house problems.

The tape or spring balance has a metal tape, permanently greased and wound on a wheel. This wheel in turn is mounted on a coiled, high-carbon steel spring inside a metal case, similar in construction to a carpenter's measuring tape. Just as sash weights were matched pound for pound to each sash, spring balances were manufactured and sold in various sizes that would offset the weight of a particular sash. Thus, the spring balance lifts the sash by a metal tape instead of a pulley.

The metal tape inside the balance is available either in the standard steel configuration or can be specially ordered with brass tape and face plate.

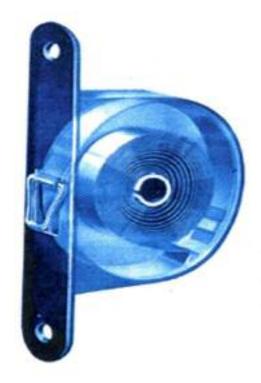

An "X-ray" view of a spring balance shows the coiled steel spring that provides the counterbalancing force.

Part Number Listing by Weight (Per Sash)

Weights Based on 2 Balances (Per Sash)

	Unit F	Unit F	Unit A	Unit A	Unit L	Unit L	Unit M	Unit M
	Side	Overhead	Side	Overhead	Side	Overhead	Side	Overhead
Lbs.	Type	Type	Type	Type	Type	Type	Typed	Туре
4 to 5	2-F	102-F	2-A	102-A				
5 to 7	3-F	103-F	3-A	103-A				
7 to 9	4-F	104-F	4-A	104-A				
9 to 11	5-F	105-F	5-A	105-A				
11 to 13	6-F	106-F	6-A	106-A				
13 to 15			7-A	107-A				
15 to 17			8-A	108-A				
17 to 19			9-A	109-A				
19 to 21			10-A	110-A	8-L	108-L		


Larger sizes are also available, please call.


www.aresource.com



Tape Balances

Dimensional Specification Chart





Dimensions	Type F	Type A	Type L	Type M
A	4 3/8"	6"	7 7/16"	8 3/4"
В	15/18"	1"	1 3/8"	1 34*
С	2 1/2"	3 7/16*	4 7/16"	5 13/16"
E	2 5/8"	3 7/16"	4 3/9"	5 7/16"
F	1"	1 5/16*	1 1/2"	1 1/2"
0	3 3/8"	4 11/16"	5 7/8"	7 1/4"
Tape Length	40"	45"	64"	60*

Overhead Type

For help with your order please call our Customer Service Representatives at,

1-800-370-8808

8AM to 5PM EST Monday - Friday

Join ARC email list to get news and updates.



Sash Chains

#25 Solid Brass #25 Solid Bronze #25 Solid Bronze Antique #25 Oil Rubbed Bronze US10B #25 Steel Brass Plated #25 Steel Antique Plated #25 Steel Zinc Plated #25 Steel Nickel Plated #25 Steel Cooper Dipped #25 Stainless Steel

Work Load 80lbs. Work Load 80lbs. Work Load 80lbs. Work Load 80lbs. Work Load 95lbs. Work Load 95lbs. Work Load 75lbs. Work Load 75lbs. Work Load 75lbs.


Work Load 150lbs.

Work Load 100lbs.

Work Load 100lbs.

Work Load 100lbs.

Work Load 100lbs.

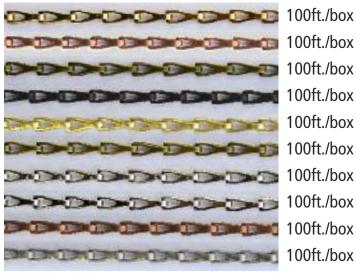

100ft./box 100ft./box 100ft./box 100ft./box 100ft./box 100ft./box 100ft./box 100ft./box

100ft./box

#35 Solid Brass #35 Solid Bronze #35 Solid Bronze Antique #35 Oil Rubbed Bronze US10B #35 Steel Brass Plated #35 Steel Antique Plated #35 Steel Zinc Plated

Work Load 105lbs. Work Load 105lbs. Work Load 105lbs. #35 Steel Nickel Plated Work Load 105lbs. Work Load 105lbs. #35 Steel Copper Dipped #35 Stainless Steel Work Load 225lbs.



100ft./box 100ft./box 100ft./box 100ft./box 100ft./box 100ft./box 100ft./box 100ft./box 100ft./box

#45 Steel Brass Plated #45 Solid Bronze Antique

#45 Solid Bronze #45 Oil Rubbed Bronze US10B Work Load 160lbs.

Work Load 160lbs.

Work Load 160lbs.

Work Load 160lbs.



100ft./box

100ft./box


100ft./box

100ft./box

Our flat chain ensures smooth, even operation for decades of dependable use. Ask about our #50 chain!



Our all-purpose sash cord is made of premium quality yarn with either a fiber or steel core that gives it additional strength and improved performance. Galvanized or stainless steel cable is used for the steel cores for added strength and durability.

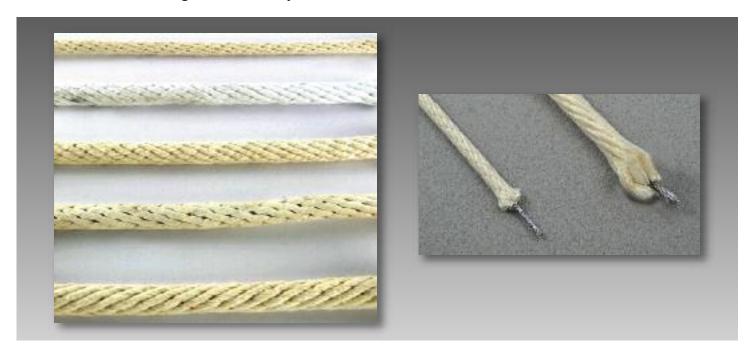

Product	Diameter	Material	Cable	Strength	Unit of Measure
#					
6	3/16" (5 mm)	cotton yarn	w/galvanized steel cable core*	450 lbs.	250 ft. reels
8	1/4" (6 mm)	cotton yarn	w/galvanized steel cable core*	400 lbs.	250 ft. reels
	1/4" (6 mm)	cotton yarn	w/stainless steel cable core**	400 lbs.	250 ft. reels
	1/4" (6 mm)	cotton yarn	no cable core	40 lbs.	100 ft. reels
10	5/16" (8 mm)	cotton yarn	w/galvanized steel cable core*	850 lbs.	250 ft. reels
	5/16" (8 mm)	cotton yarn	no cable	50 lbs.	100 ft. reels
12	3/8" (9.5 mm)	cotton yarn	w/galvanized steel cable core*	2000 lbs.	250 ft. reels

^{*} The steel cable insures that if the rope breaks you won't lose your weights inside the weight pocket.

^{**} Stainless steel is excellent for seaside applications or installations in other locations where corrosion and rusting may be a concern.



Stackable Weights

Square Stackable Iron Weights

The Original Stackable Iron Weights designed by
Bob Markarian

founder of ARC.



Window Weights Square Stackable Weights

Material	Size	Square Dimension	Length
Iron	1 lb.	1 3/4"	1 3/8"
	3 lb.	1 3/4"	4 1/16"
	5 lb.	1 3/4"	6 7/8"
Lead	2 lb.	1 7/8"	1 1/8"
	3 lb.	1 7/8"	2 9/16"
	5 lb.	1 7/8"	3 3/4"

Round Stackable Lead Weights



Round Lead Weights

Material	Size	Length
1.5"	1 lb.	1 9/16"
	5 lb.	7 3/4"
1.875"	1 lb.	15/16"
	5 lb.	4 11/16"

Iron

Lead

Square Stackable Weights

We are proud of our patented stackable weight system. You can easily combine different size weights in any combination to create the perfect counterbalance for any window sash. In fact, when stacked together a 3 lb. weight and two 1 lb. weights take up the same amount of room as one 5 lb. weight and move just as smoothly in the window pocket.

Our weights are available in iron or lead.

Round Weights

Our round window weights come in two sizes and diameters. They can be ordered with or without our plastic sleeves, which keep the weights aligned when sliding inside the weight pocket and safely encases the lead in plastic. Like our other weights, they come with a center hole drilled the length of each weight so that the sash chain can pass through and fasten at the bottom.



Plastic Sleeves (for round lead weights)

"A Veteran Owned Business"

1-800-370-8808



Chain, Cord and Window Accessories



44 Spirals
Diameter: 3/4"

33 Spirals
Diameter: 7/8"



81 S-Hooks Diameter: 3/4"

82 S-Hooks
Diameter: 7/8"



8 C-Hooks
Diameter: 5/8"



Wire Clips 3/16", 1/4" & 5/16"

**Spirals, C-hooks, and S-hooks are all sold in boxes of 100 each.

Note: These accessories are not weight rated.



Solid Brass Sash Lifts

Lifts

Our Finger Lifts, Mortise Lifts, and Projected Lifts come in a variety of sizes and styles to accommodate any period or architectural style. We offer a broad scope of colors and finishes to meet every need.

Finger Lifts



#301

Forged Brass Lift

Base Length: 1 3/4" Base Height: 7/8" Total Height: 1 1/2" Projection: 1"



4219

Georgian Cast Brass Lift

Base Length: 2 1/4" Base Height: 15/16" Total Height: 2 1/8" Projection: 1 1/2"



330

Small Solid Cast Brass Lift

Base Length: 15/16" Base Height: 5/8" Total Height: 1 11/16" Projection: 1 1/8"

Large Solid Cast Brass Lift

Base Length: 1 3/4" Base Height: 1 1/4" Total Height: 1 1/2" Projection: 1 1/4"



#3

Solid Cast Brass Lift

Base Length: 1 3/4" Base Height: 1 1/4" Total Height: 1 1/2" Projection: 1 1/4"



Solid Brass Sash Lifts

Mortise Lifts



107

Cast Brass Lift Small

Length: 3 15/16" Width: 1 11/16" Depth: 7/16" Mortise Length: 2 1/2" Mortise Width: 15/16"

Mortise Depth: 7/16"

Cast Brass Lift Large

Length: 3 15/16" Width: 1 7/8" Depth: 9/16" Mortise Length: 2 1/2" Mortise Width: 15/16"

Mortise Depth: 11/16"



222

Forged Brass Lift

Length: 3 1/8" Width: 1 5/16" Depth: 1/2" Mortise Length: 2 7/8" Mortise Width: 1 11/16"

Mortise Depth: 3/8"

Hardware Experts for over 29 years

All Lifts available in many finishes see page 49.



2165

Stamped Brass Lift

Length: 3" Base Height: 1 1/8" Depth: 3/8" Mortise Length: 2 3/8" Mortise Width: 11/16"

Mortise Depth: 3/8"



3021

Cast Brass Lift

Length: 5" Base Height: 1 13/16" Depth: 3/8" Mortise Length: 3 11/16" Mortise Width: 1 5/8"

Mortise Depth: 5/16"





3022

Cast Brass Lift

Length: 4" Height: 1 1/16" Overall: 1/2" Mortise Length: 3 1/4" Mortise Height: 1" Mortise Depth: 3/8" 1/16" Plate Thickness



4222

Cast Brass Lift

Length: 4 15/16" Width: 1 3/4" Depth: 7/16" Mortise Length: 4 1/4" Mortise Width: 1 1/4"

Mortise Depth: 3/8"



4225

Cast Brass Lift

Length: 3 1/2" Width: 1" Depth: 7/16" Mortise Length: 2 3/4" Mortise Width: 7/8"

Mortise Depth: 5/16"

For help with your order please call our Customer Service Representatives at,

1-800-370-8808

8AM to 5PM EST Monday - Friday

Join the ARC email list to get news and updates.

© Copyright 2022



Solid Brass Sash Lifts

Projected Sash Lifts

27

Solid Brass Lift

Length: 4 7/8" Width: 1 3/16"

Projection: 1 1/16"



1001

Solid Brass Lift

Length 5" Length 6" Width: 1" Width: 7/8"

Projection: 1 1/16" Projection: 1 1/8"



2107

Off Center Solid Brass Lift

Length: 4 7/8" Width: 1 3/16"

Projection: 1 1/8"



2136

Solid Brass Lift

Through Bolted Lift

Length: 6" Width: 1 1/4"

Projection: 2"



2137

Solid Brass Lift

Through Bolted Lift

Length: 6 1/2" Width: 1"

Projection: 1 3/4"



Lifts available in many finishes see page 49.



Solid Brass Locks

Our Most Popular Sweep Locks



10 Solid Brass Sweep Lock

double spring clips insure tight action

Lock Length: 2 7/8" Lock Width: 1" Keeper Length: 2 7/8" Keeper Width: 3/8"



9 Solid Brass Sweep Lock

often sold as historical replacement

Lock Length: 2 13/16" Lock Width: 1" Keeper Length: 2 13/16" Keeper Width: 9/16"



Solid Brass Sweep Lock

lock often sold as historical replacement

Lock Length: 2 13/16" Lock Width: 1" Keeper Length: 2 13/16" Keeper Width: 9/16"



4220 (Left & Right) Solid Brass Sweep Lock

comes with either right or left hand operation

Lock Length: 2 1/2" Lock Width: 9/16" Keeper Length: 2 5/8" Keeper Width: 1/2"



4012

Solid Brass Hook Fastener Security Lock

Also see page 16

Length from back of faceplate: 2 5/8"
Width: 1 3/16"
Strike Length: 2 1/2"
Striker Width: 3/8"



4215

Solid Brass Fastener Security Lock

Length from back of faceplate: 2 3/4 " Width: 15/16"

Strike Length: 2 3/4" Striker Width: 7/16"

Customer Service 1-800-370-8808 8AM to 5PM EST

"A Veteran Owned Business"

1-800-370-8808



Solid Brass Locks

Pole Operated Locks



102A

Solid Brass

pole operated signal lock

Lock Width: 5/8"

Lock Length: 2 3/8"

Keeper Length: 2 3/8"

Keeper Width: 1 1/8"

102B

Solid Brass

pole operated signal lock


Lock Length: 2 3/8"

Lock Width: 7/8"

Keeper Length: 2 3/8"

Keeper Width: 1 1/8"

Solid Brass Transom Locks



#80

Solid Brass

pole operated transom lock available in either an in-swing or out-swing model

> Lock Length: 2 1/4" Lock Width: 1 1/4" Keeper Length: 1 7/32" Keeper Width: 1 3/8"




4221

Solid Brass

pole operated transom lock available in either an in-swing or out-swing model

> Lock Length: 2 1/2" Lock Width: 9/16" Keeper Length: 2 5/8" Keeper Width: 1/2"



9955

Solid Brass

pole operated transom lock available in either an in-swinging or out-swinging models

Lock Length: 2 3/4"
Lock Width: 1 11/16"
Keeper Length: 1 13/16"
Keeper Width: 2 1/8"

"A Veteran Owned Business"

1-800-370-8808



Solid Brass Locks

Solid Brass Quadrant Locks

3018

Lock Length: 2 5/8" Lock Width: 3/4"

Keeper Length: 2 5/8" Keeper Width: 3/4"



#3061

Lock Length: 2 5/8" Lock Width: 3/4"

Keeper Length: 2 5/8" Keeper Width: 3/4" Knob: porcelin





Security Locks



#4012L

Solid Brass Quadrant Lock with Security Screw

Length from back of faceplate: 2 5/8"
Width: 1 3/16"

Strike Length: 2 1/2" Strike Width: 3/8"

Two Types:

Standard & Locking



104

Brass Security Lock Set

Length from back of faceplate: 1 1/16"

Strike Length: 1 15/16" Strike Width: 1 1/8" Diameter, rim from faceplate: 3/4"

Diameter cylinder: 9/16"

Try our free quote system for your project

at

brasswindowhardware.com/ quote



--0

5032

Brass Security Lock

Length from back of faceplate: 1 3/16"

Faceplate Length: 1 11/16" Faceplate Width: 3/4" Faceplate Thickness: 1/16"

5034 Security Lock Key



0-

5033

Brass Security Lock

Length from back of faceplate: 2 5/8"

Diameter cylinder: 5/8" Faceplate Length: 1 11/16"

Faceplate Width: 3/4"

Faceplate Thickness: 1/16"

5034

Security Lock Key

Hardware Experts in our 29th year

Visit our website at,

www.aresource.com

"A Veteran Owned Business"

1-800-370-8808



Spring Locks

#3

Brass Spring Lock

Lock Base Length: 1 7/8" Lock Base Width: 1 1/8"

Keeper/Strike Length: 1 11/16" Keeper/Strike Width: 11/16"



#4

Brass Spring Lock


Lock Base Length: 2 5/16" Lock Base Width: 1 3/8" Keeper/Strike Length: 2 1/4" Keeper/Strike Width: 5/8"



0001

Brass Spring Lock

Lock Base Length: 2 5/16" Lock Base Width: 1 3/8" Keeper/Strike Length: 2 1/4" Keeper/Strike Width: 5/8"

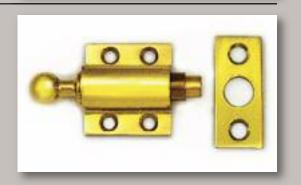

For available finishes see page 49.

Double Hung Window Hardware

Pole Operated Window Opener



117 Solid Brass Window Hook



118 Solid Brass Window Hook



Oak or Mahogany Pole with rubber bumper Available in standard 6 or 8 foot lengths or custom cut to your specifications. For use with either the 117 or the 118 Window Hooks.



117H
Solid Brass Hanger
Used to
hang pole
when not in use.



18
Solid Brass Pole Socket
Use with the 117 pole hook.
Diameter: 7/8"

Rim Width: 1 1/8" Rim Depth: 5/8"



Visit our website at, www.aresource.com

Double Hung Window Hardware

Window Accessories



6

Brass Grommet and Screw

Also known as a stop bead adjuster.

Diameter: 11/16"

Available with 1" and 1 1/4" Screws

Request Slotted or Philips Head Screws
*Screws are plated stainless steel for strength and durability.
See finishes on page 49



12

Brass Grommet and Screw

Also known as a stop bead adjuster.

Diameter: 7/8"

Available with 1" and 1 1/4" Screws

Request Slotted or Philips Head Screws
*Screws are plated stainless steel for strength and durability.

See finishes on page 49



WBI White or WB2 Black

Rubber Bumpers

Flexible shock absorbing window bumper. Diameter: 3/4" Depth: 3/8"




Bronze Screening

Classic traditional screening material for windows, doors and other applications. Stronger than copper screen with wire gauge measuring .011 and 18x14 mesh per inch.

Available in 100 foot lengths in the following widths: 24", 30", 36", 48" and 60"

Casement Window Hardware

Solid Brass Casement Hardware

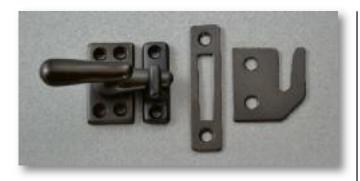

066 Solid Brass Lock

Length: 1 5/8" Width: 1 7/8"
Projection: 1 3/8"
Includes: Surface, Mortise or Rim Strikes



3017 Solid Brass Lock

Length: 5" Width: 1"

Projection: 1 1/4" with either Surface, Mortise or Rim Strike



3063

Solid Brass Lock

Length: 4 11/16" Width: 2 1/8" Projection: 1"

with either Surface or

Mortise Strike



6255

Solid Brass Lock

Length: 4"
Width: 2 1/4"
Projection: 1 1/2"

with either Surface or Mortise Strike



6259

Solid Brass Lock

Length: 5"
Width: 1 1/16"
Projection: 1 11/16"
with either Surface or

Mortise Strike



See Finishes on page 49




Casement Window Hardware

Solid Brass Casement Adjusters



71Adjustable in 10" and 12" lengths
Horizontal Mount

4182
Telescopic Adjustable Casement Stay
Adjusts from 8" to 12" long
Horizontal Mount

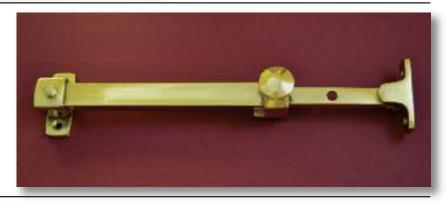



4423Adjustable in 8", 10" and 12" lengths
Horizontal Mount

3016Adjustable in 8", 10" and 12" lengths
Horizontal Mount





Transom Window Hardware


Solid Brass Transom, Awning or Hopper Hardware






TC01 and # TC02 **Solid Brass Transom Chain**

Standard Chain Length: 12" Longer lengths available for extra charge.

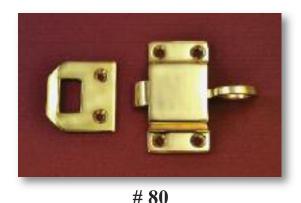

Small Solid Brass Transom Lock Length: 2 3/16"

Width: 1 1/4" ** available in in-swinging and outswinging models

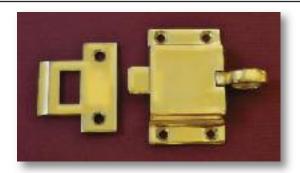

9955 **Large Solid Brass Transom Lock** Length: 2 3/4" Width: 1 11/16"

** available in in-swinging and out-swinging models



Solid Brass Lock

Length: 2" Keeper Width: 2 13/16" ** available in in-swinging and out-swinging models



346

Adjustable Ball Catch

Diameter: 11/16" Length: 1 1/2"

Faceplate Length: 2 1/8" Faceplate Width: 1"



Double Hung Wood Windows Full Size Details Standard Rib Strip for Residential or Commercial Buildings No. 5 Equipment Heads & Sills-Plain 1/e" rib x 1/e" high 2/a" flange (.018) **Head Section** 2P 1" wide 4P 13/4" wide 7P 12/4" wide 9P 2" wide Meeting Rails M1Z (.024) large hook M2Z(.018) small hook Meeting Rail Alternate Meeting Rails M3Z (.018) hemmed hook M4Z (.018) double flat Upper & Lower Sides-Corrugated 1/s" rib x 7/1s" high 3/s* flange (.018) Jamb Section 4C 13/6" wide 70 13/4" wide 9C 2" wide 10C 21/4" wide 11C 21/2" wide 3/a" Sash Sill Section Recommended Equipment by Sash Thickness 21/4" Sash Thickness 12/s" Sash Thickness 13/4" Sash Thickness 2" Sash Thickness Head-4P Head-4P Head-2P Head-2P Upper Side-10C Upper Side-40 Upper Side—70 Upper Side-9C Meeting Rails-M1M2 Meeting Ralls-M1M2 Meeting Rails-M1M2 Meeting Ralls-M1M2 Lower Side-100 Lower Side-110 Lower Side-70 Lower Side-9C SII-10P SIII-4P SIII-7P 8111-92

Double Hung Wood Windows


Full Size Details

Return Flange Equipment for Residential or Commercial Buildings

Heads & Sills-Plain

'/a" rib x '/1e" high
'/a" flange (.018)

2P 1" wide 4P 1%" wide 7P 1%" wide 9P 2" wide 10P 2%" wide

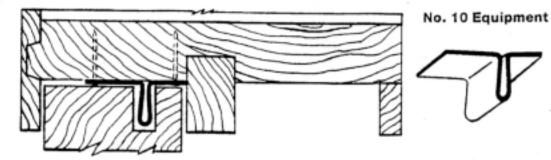

Head Section

Meeting Rails

M1Z (.024) large hook M2Z(.018) small hook

Alternate Meeting Rails

M3Z (.018) hemmed hook M4Z (.018) double flat

Upper & Lower Sides—Corrugated 1/a" rib x "/+a" high 3/a" flange (.018)

300C 13/4" wide 302C 13/4" wide 303C 2" wide 304C 21/4" wide

Recommended Equipment by Sash Thickness

13/e" Sash Thickness


Head—2P Upper Side—300C Meeting Rails—M1M2 Lower Side—302C Sill—4P


13/4" Sash Thickness


Head—2P Upper Side—302C Meeting Rails—M1M2 Lower Side—303C Sill—7P

2" Sash Thickness

Head—4P Upper Side—303C Meeting Rails—M1M2 Lower Side—304C Sill—9P

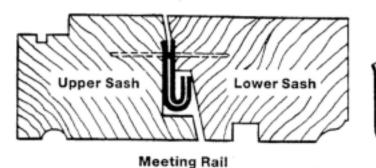

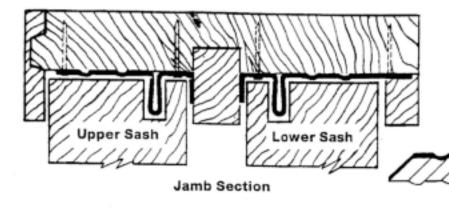

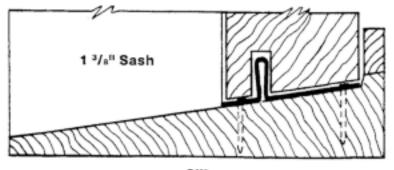



SIII




Metal Weather Strip Cushion and Spring Types

Cushion Type For Wood and Metal Frames



The above type of Weatherstripping can also be attached to Metal Jambs with 5/1e"x#4 water Head Brass or Nickel Plated drive screws. Use #37 HS Drill bit.

122 B = 1/2" 125 B = 1" 123 B = 5/8" 126 B = 1 1/8" 124 B = 3/4"

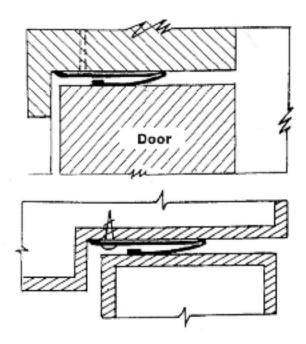


Spring Type For Wood Frames



Spring Bronze Sold in 100 Ft. Coils

25B 11/4" wide x .009 11/4" wide x .009 13/6" wide x .009 13/4" wide x .010

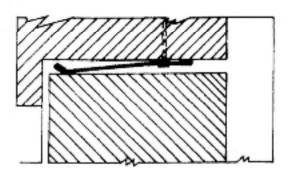

Spring Type Door Sets




Concealed Interlocking Weatherstrips

Full Size Details


For Wood Doors



16AB (.016) 16AZ (.018)

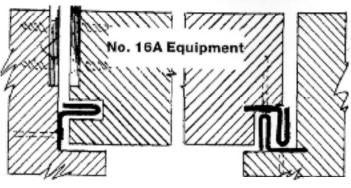

Hinge side



Head & Lock side

Our 29th Tear

For help with your order please call our Customer Service Representatives at,


1-800-370-8808

8AM to 5PM EST Monday - Friday




Non-Vinyl Wrapped foam Q-Lon (QDS) series:

Our QDS weather seal profile can be for kerf or kerfless applications. Please see specific product descriptions. The seal is made of a cellular modified foam core and is clad in an embssed non-vinyl, paint-resistant liner which is U.V. stabilized.

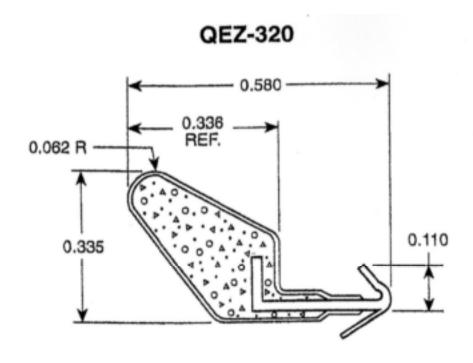


QEZ-260

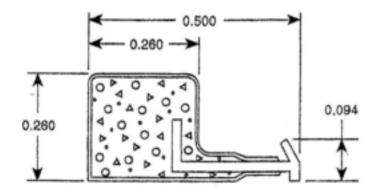




Bulb and Leaf Weather Strip

Our Bulb and Leaf weather strip is available in two types, the APT and PF series. The APT weather strips have a resiliant bulb and ridgid kerf leg. The PF or Polyflex series is an extruded copolymer which resists rot, mildew and corrosion.

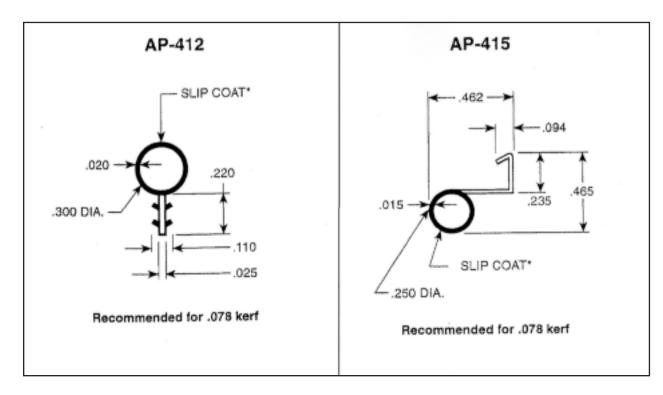

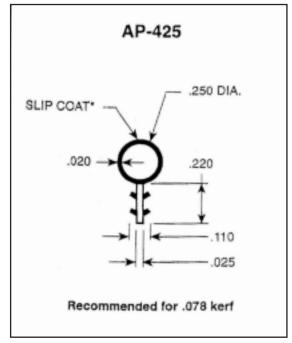



QDS-375 (adhesive-backed) SPECIFICATION SHEET

This Q-LON® door seal profile is for kerfless applications. The seal is composed of a cellular modified foam core and is clad in an embossed non-vinyl, paint-resistant liner which is U.V. stabilized.

Height/Reach:

.385" ± .030

Maximum Width:

.420" ± .035

Stop Width:

1/2" (.500)

Rec. Jamb:

4 9/16" or standard

Rabbet Depth:

1 7/8" or 1 15/16"

Colors:

Bronze, white, black,



Less than 1% at 78° F

Only 18% at 158° F

Less than 1% at 0° F

Installation:

One profile seals the strike side, hinge side and

header.

Note: Recommended temperature for installation-not

less than 40° F. Surface of frame should be clean, dry

and free of oils or grease.

Out-of-square Installation: QDS-375 has a .375 (3/8") reach and will allow for as much as 1/4" movement toward or away from the door

while maintaining a tight seal.

Thermal Bow:

Cellular core stays soft at low temperatures. Allows for

bow while maintaining a tight seal and causes no

operational difficulty.

Longevity:

Excellent, QDS-375 contains no plasticizers to cause

deterioration over time.



QDS-500 SPECIFICATION SHEET

This Q-LON® door seal profile is for kerfed applications. The seal is composed of a cellular modified foam core and is clad in an embossed, non-vinyl, U.V. stabilized, paint-resistant liner.

Height/Reach: ,512° ± .040 Maximum Width: ,585° ± .030

Length of Kerf Leg: .300"

Width of Kerf Leg: .143" (will compress to .125")


Rec. Kerf Width: .125" (1/8") Rec. Kerf Depth: .340" (11/32")

Rec. Jamb: 4 9/16" or any standard

Rabbet Depth: 1 15/16"

Rec. Kerf Angle: 5° toward jamb

Colors: Bronze, beige, white, black

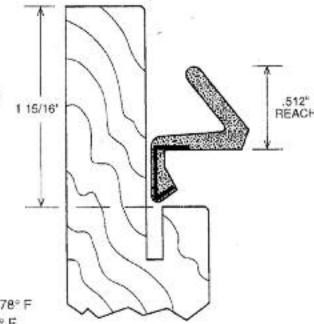

Compression Set:

Less than 1% at 78° F Only 18% at 158° F

Less than 1% at 0° F

Installation:

Profile seals the strike side, hinge side and header.

Out-of-square Installation:

QDS-500 has a .512" reach and will allow for as much as 3/16"

movement toward or away from the door while maintaining a tight seal.

Thermal Bow:

Cellular core stays soft at low temperatures. Allows for bow while maintaining a tight seal and causes no operational difficulty.

Longevity:

Excellent, QDS-500 contains no plasticizers to cause deterioration

over time.



Non Metal Weather Strip

QDS-650 SPECIFICATION SHEET

This Q-LON® door seal profile is for kerfed applications. The seal is composed of a cellular modified foam core and is clad in an embossed. non-vinyl, paint-resistant liner which is U.V. stabilized.

Height/Reach: .650"± .035

Maximum Width: .580" reference angle

Length of Kerf Leg: .380"


.140" ± .010 Width of Kerf Leg: Rec. Kerf Width: .125" (1/8") Rec. Kerf Depth: .340" (11/32")

> 4 9/16" or any standard Rec. Jamb:

2 1/8" Rabbet Depth:

5º toward jamb Rec. Kerf Angle:

> Colors: Bronze, beige, white, black

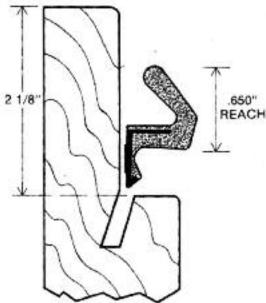

Compression Set: Less than 1% at 78° F

Only 18% at 158° F Less than 1% at 0° F

Installation: One profile seals the strike side, hinge side and

header.

Out-of-square QDS-650 has a .650" reach and will allow for as much Installation: as 5/16" movement toward or away from the door

while maintaining a tight seal.

Thermal Bow: Cellular core stays soft at low temperatures. Allows for

bow while maintaining a tight seal and causes no

operational difficulty.

Longevity: Excellent, QDS-650 contains no plasticizers to cause

deterioration over time.



Non Metal Weather Strip

Corner Tubeseal Weather Strip

We offer several different sizes of superior quality, thin-wall silicone rubber corner tubeseal to assure perfect sealing of any gap from 1/64" to 3/8" with virtually no noticeable increase in closing pressure. Tubeseal features a friction-grip foot designed to fit a 1/8" wide straight groove kerf cut.

** We offer the WS98 Corner Grooving Machine as a special purchase item. Drill bits specifically designed for the tubeseal weather strip are available with the WS98 or can be purchased separately, please call.




Product	WS03	WS04	WS06	WS32	WS33	WS34	WS35	WS36
Material	Silicon Rubber							
Color/	White	White	White	White,	Brown,	Brown,	Brown,	White
Finish				black	white,	white,	white,	
					black	black	black	
Kerf Width	1/8"							
Kerf Height	1/4"							
Oval Diameter		9/32"	13/32"	3/16"	1/4"	5/16"	3/8"	7/16"
Fill Gaps	1/64"	1/32"	1/16"	1/8"	3/16"	1/4	5/16"	3/8
Unit of Measure	100 foot increments							




Non Metal Weather Strip

Timberseal/Timber Fin-Seal Weather Strip

Timberseal weather strip offers all the performance benefits you expect from any pile weather strip but in a design for easy kerf insertion. The barbed anchor, made of rigid polypropylene, locks the seal within the kerf slot of any frame material. **Timber Fin-Seal** offers the same benefits as timberseal with the addition of an integral center fin.

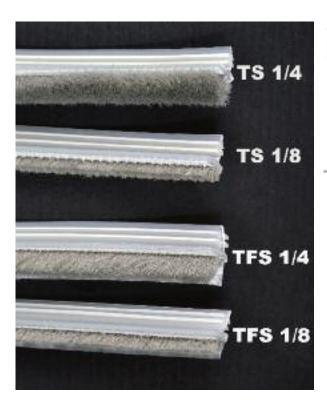


Timber Seal weatherstripping offers all the performance benefits you expect from Fin-Seal*, but in new designs for easy kerf insertion. The barbed anchor, made of rigid polypropylane, looks the seal within the kerf.



Product Specifications:

Kert leg of rigid polypropylana attached to 0.1871/4.75mm backing, medium density pile weatherstripping.


TS/TFS 4800 37



Product	TS .150	TS .250	TFS .150	TFS .250	
Material	Polypropylene		Polypropylene with plastic center fin		
Color/Finish	Gray pile with clear kerf.		Gray pile with either clear kerf.		
Height	1/8"	1/4"	1/8"	1/4"	
Unit of Measure	100 foot increments		100 foot increments		



Other Weather Strip Accessories

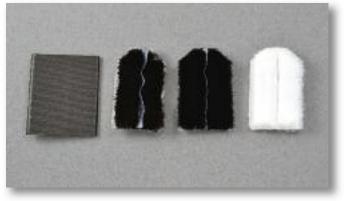

Dust Plugs

Felt & Vinyl
Available in standard pile or Fin-Seal.
Dust plugs come with adhesive back.
Brown, White or Black
2(L) x 1 1/4"(W)



27B - Lock Strips

Bronze
For use with the
25B Spring Bronze weather strip.
Length: 9"



Nails

Solid Brass, Copper Dip or Zinc Plated For use with all types of metal weather strip. Wide variety available, please call.



Call to join ARC email list to get news and updates.



Brass, Bronze, Stainless Steel, and Plated Available in many finishes, sizes, and head designs.

Our Most Popular Sizes

Size	Material	Slotted or Phillips	Head Type
6 x 1"	brass	slotted	oval head
8 x 1"	brass	Phillips	flat head
8 x 1"	brass	slotted	pan head
8 x 1"	brass	slotted	button head
8 x 1"	brass	slotted	flat head
8 x 1 1/4"	brass	slotted	round head
8 x 1 1/4"	brass	Phillips	round head
10 x 1"	brass	Phillips	flat head
10 x 1 1/4"	silicon bronze	Phillips	flat head
10 x 1 1/4"	brass	Phillips	flat head
12 x 1"	brass	Phillips	flat head

NOTE: We have additional sizes and styles not shown or listed. Please call us for assistance to find what you need.



Door Hardware

Surface and Flush Bolts

Surface mounted sliding bolts provide additional security for you window or door







2115 Solid Brass Surface Bolt

Available in 3", 4" and 6" lengths.

Width: 19/32" Projection: 5/8"

2145 Solid Brass Surface Bolt

Length: 4 3/8" Width: 1"

2148

Solid Brass Surface Bolt

Available in 8", 12" and 18" lengths

Flush Bolts are perfect for applications where you desire an extra measure of security for your doors and windows. Insetting this lock into a mortise allows use in applications (such as pocket doors or double doors) where other sections of the door have to slide past the bolt. The adjustable bolt rod creates great flexibility in the placement of the lock so that you can offset the lock mechanism to the optimal amount for your project. A flip of the toggle operates the sliding bolt mechanism.



2116 Solid Brass Flush Bolt

Available in 4" and 6" lengths with Mortise Strike



2168 Solid Brass Flush Bolt

12" rod standard Available in other lengths.




Solid Brass Cremone Bolts

Our Cremone Bolts have been discontinued. We apologize for any incovenience.

Saddles Fluted Tops

Full Size Details

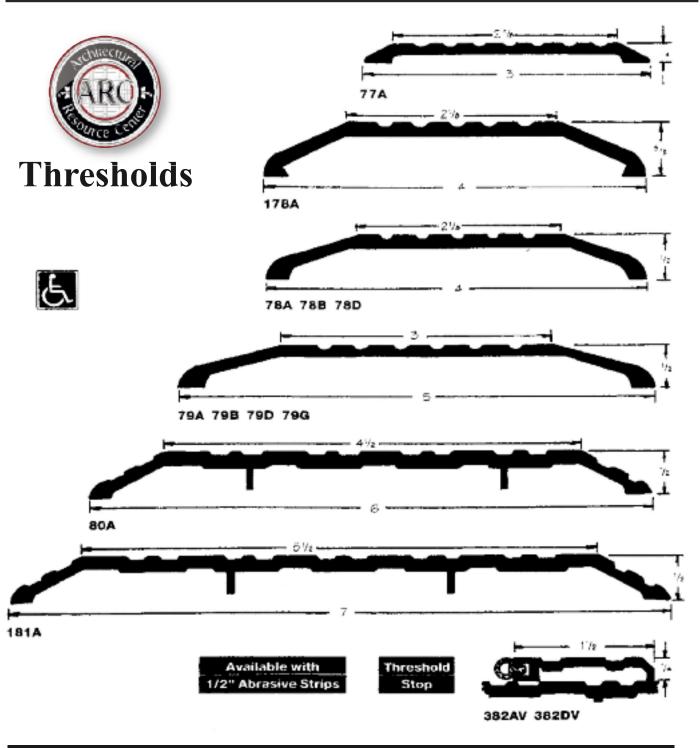

MATERIAL DESIGNATIONS

- **A** Aluminum **B** Bronze
- **B** Architectural Bronze
- **D** Dark Brown Anodized or Paint

- **E** EPDM-Rubber Polymer **F** Felt
- **G** Gold
- N Solid or Closed Cell Neoprene

P Pile


- SS Stainless Steel V Vinyl
- **Z** Zinc



Latchtrack Thresholds

Full Size Details

For Use with Panic Type Hardware

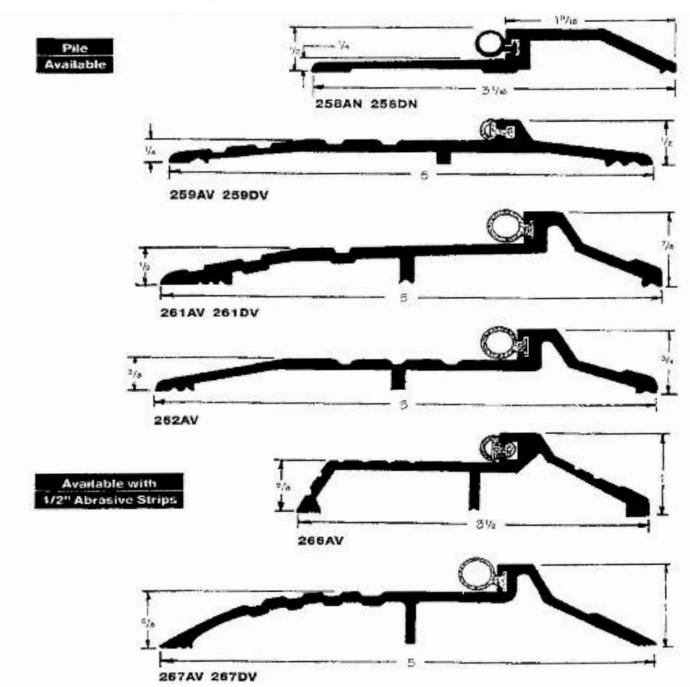

MATERIAL DESIGNATIONS

- **A** Aluminum
- **B** Bronze
- **B** Architectural Bronze
 - **D** Dark Brown Anodized or Paint

- **E** EPDM-Rubber Polymer **F** Felt
- **G** Gold
- N Solid or Closed Cell Neoprene

P Pile


- SS Stainless Steel V Vinyl
- **Z** Zinc
- 1-800-370-8808



Latchtrack Thresholds

Full Size Details

For Use with Panic Type Hardware

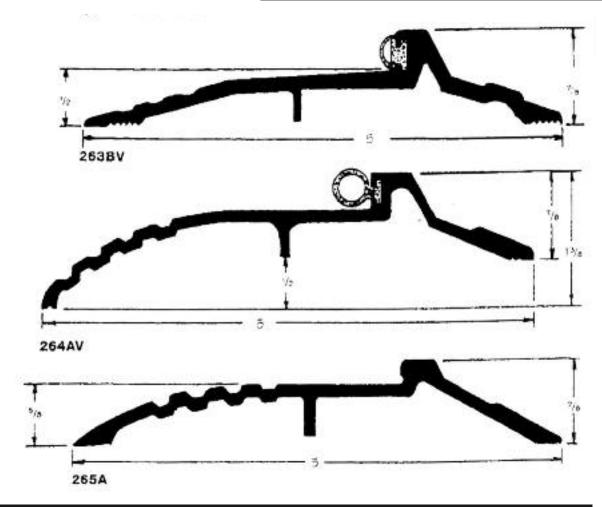

MATERIAL DESIGNATIONS

A Aluminum
 B Bronze
 B Architectural Bronze
 D Dark Brown Anodized or Paint
 E EPDM-Rubber Polymer
 F Felt
 G Gold
 N Solid or Closed Cell Neoprene

P Pile SS Stainless Steel V Vinyl Z Zinc

For help with your order please call your Customer Service Representative at,

1-800-370-8808

Monday - Friday 8AM to 5PM EST


Join the ARC email list to get news and updates.




Thresholds

Door Sweeps

Full Size Details

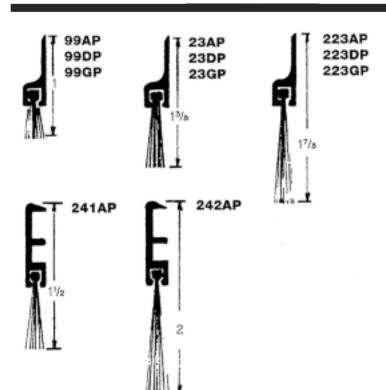


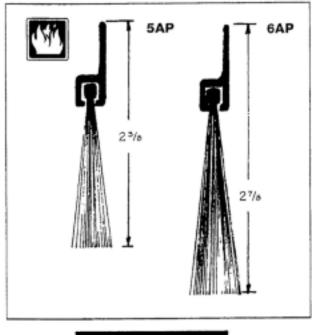


Other Brush Lengths Available

Special Pile Door Bottoms





12AP



11AP

Other Brush Lengths Available

MATERIAL DESIGNATIONS

- **A** Aluminum
- **B** Bronze
- **B** Architectural Bronze
- **D** Dark Brown Anodized or Paint

- **E** EPDM-Rubber Polymer **F** Felt
- **G** Gold **V** Vinyl
- N Solid or Closed Cell Neoprene

- P Pile
- SS Stainless Steel

Z Zinc

www.aresource.com


"A Veteran Owned Business"

1-800-370-8808

Thresholds :

Interlocking Thresholds

Full Size Details

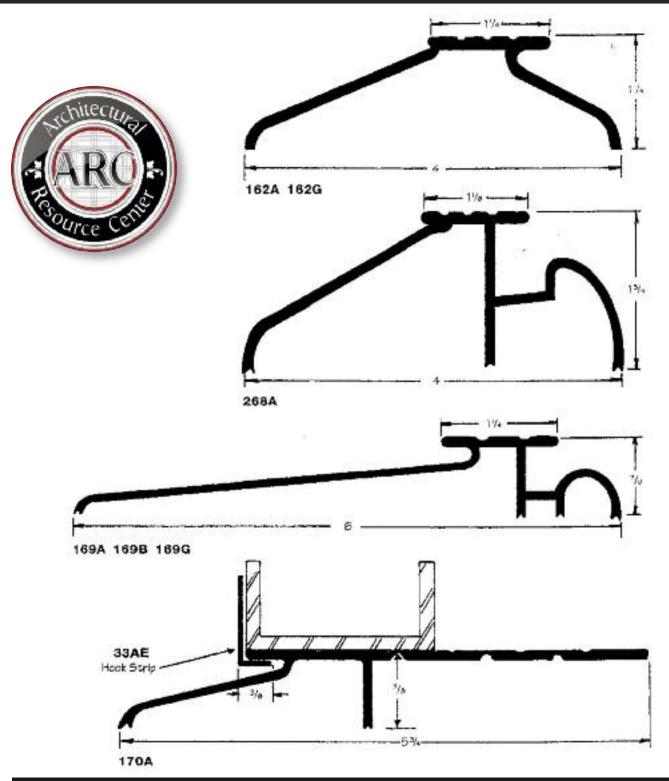


MATERIAL DESIGNATIONS

- A Aluminum B
- **B** Bronze
- **B** Architectural Bronze
- **D** Dark Brown Anodized or Paint
- EEPDM-Rubber PolymerFFeltGGoldPPileSSStainless SteelVVinyl
- N Solid or Closed Cell Neoprene
- **Z** Zinc

Thresholds

Interlocking Thresholds

Full Size Details

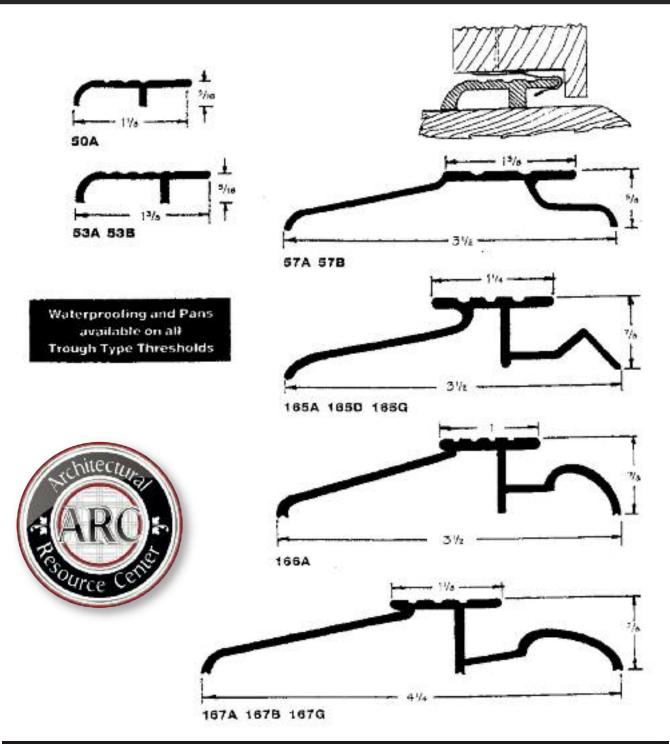

MATERIAL DESIGNATIONS

A Aluminum B Bronze

Bronze **B** Architectural Bronze

D Dark Brown Anodized or Paint

E EPDM-Rubber Polymer **F** Felt

F Felt **G** Gold **SS** Stainless Steel **V** Vinyl

N Solid or Closed Cell Neoprene


Z Zinc

P Pile

Thresholds

Door Bottoms

Full Size Details

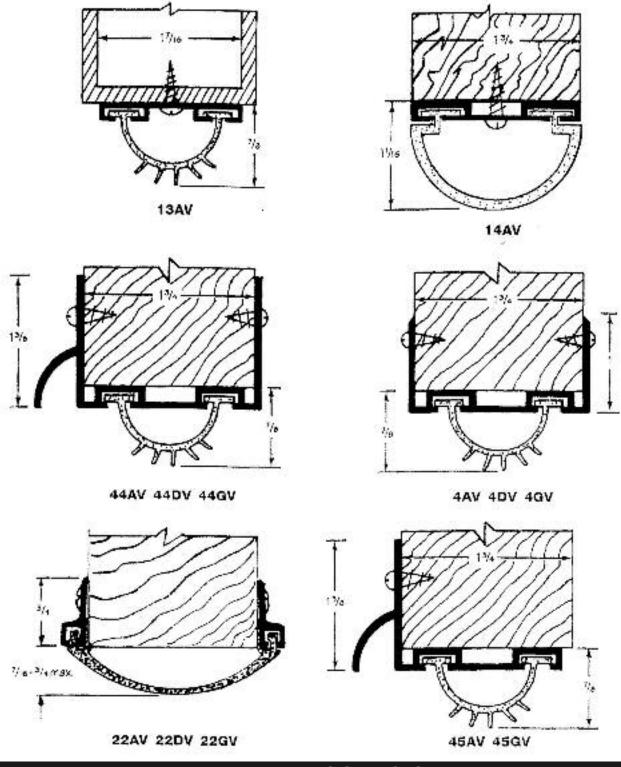

MATERIAL DESIGNATIONS


G Gold

- **A** Aluminum **B** Bronze
- **E** EPDM-Rubber Polymer **F** Felt
- SS Stainless Steel V Vinyl P Pile
- **B** Architectural Bronze **D** Dark Brown Anodized or Paint

 - N Solid or Closed Cell Neoprene
 - **Z** Zinc

Double Door Equipment

Full Size Details

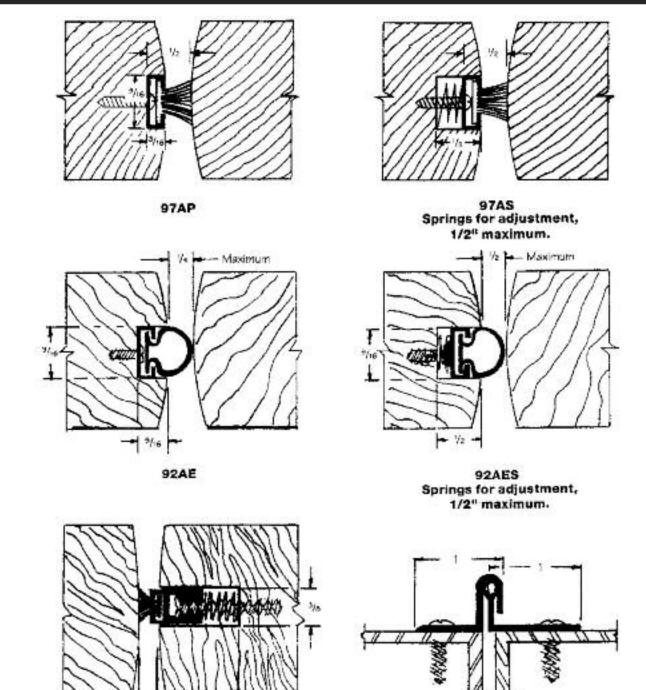

MATERIAL DESIGNATIONS

G Gold

A Aluminum

Max. Closure

86P

B Bronze

B Architectural Bronze **D** Dark Brown Anodized or Paint

E EPDM-Rubber Polymer **F** Felt P Pile

SS Stainless Steel V Vinyl

N Solid or Closed Cell Neoprene

Z Zinc


34A 33AE

www.aresource.com

"A Veteran Owned Business"

1-800-370-8808

Dip Caps

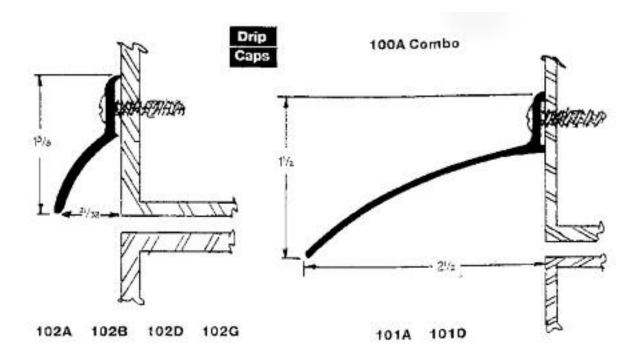

MATERIAL DESIGNATIONS

A AluminumB BronzeB Architectural BronzeD Dark Brown Anodized or PaintE EPDM-Rubber PolymerF FeltG GoldN Solid or Closed Cell NeopreneP PileSS Stainless SteelV VinylZ Zinc





Solid Brass Hinges

Our extruded hinges come in many sizes and styles without any brand name or identification.



PRODUCT NUMBER	DESCRIPTION
DH:SB303020-PJ	3" x 3" Plain
DH:SB353530-PJ	
DH:SB353530-BB	
DH:SB404030-PJ	4" x 4" Plain
DH:SB404030-BB	4" x 4" Plain Ball Bearing
DH:SB454535-PJ	
DH:SB505040-PJ	5" x 5" Plain
DH:SB505040-BB	5" x 5" Ball Bearing

Various Finials Available - Ball, Flat or Steeple Tip

Off Center and Center Pivot Hinges

Lift Off Hinges

Available Right or Left Handed

1802

Length: 3" Width: 2"

Thickness: 1/16"

1803

Length: 3 1/2" Width: 2 1/4"

Thickness: 1/16"

1804

Length: 3 1/2" Width: 3 1/2"

Thickness: 1/16"

U 4000

1902

Length: 2 1/2" Width: 1 1/2"

Thickness: 1/16"





2602

4" Off Center Hinge

Length: 3 3/4" Width: 15/16"

2603

3" Off Center Hinge

Length: 2 7/8" Width: 11/16"

2501

3" Center Hinge

Length: 2 7/8" Width: 11/16"

2504

4" Center Hinge

Length: 3 15/16" Width: 15/16"



4040

Brass Parliment Hinge

Length: 4" Width: 4"

Thickness: 4mm



Custom Hardware

"Quality Hardware Replication for any budget"

Custom Castings for Window and Door Hardware

At ARC we have been reproducing antique window and door hardware for over 29 years.

We understand that replacing traditional hardware for historic buildings can be a challenge. Regulations surrounding historic preservation often require exact replacement of original hardware, even if the original hardware is no longer available.

We can custom fabricate, machine or finish any hardware to meet your needs.

Call us to discuss a project or for a quote.





Finish Samples



















Most of our hardware is available in these finishes. Call us for Custom Finishes or for your presentations.

www.aresource.com

"A Veteran Owned Business"

1-800-370-8808



How We Do Business

Ordering Process

Call for pricing on catalog items, or to discuss custom castings or special orders. Requests for Quotes are welcome. All major credit cards are accepted, terms are available with completion and approval of a credit application.

Return Policy

Returns accepted within 30 days of invoice date.

Before making a return: you must call our office for approval so that we can properly manage our inventory. All returns must arrive unopened in the original packaging and in new condition. If any items are damaged we cannot accept them as returns. Please pack your returns carefully as we cannot credit damaged goods. There is a minimum 30% restocking charge on all returned items. Once the returned items have been received, inspected and approved for resale, a credit will be issued.

NOTE: There are a few items we cannot accept as returns:

• Special Orders • Custom fabrication, and finishes • Sash Weights • Bronze wire screening

Quality Guarantee

We stand behind the quality and craftsmanship of our products. We will happily exchange or replace any defective products. This guarantee does not cover abuse or installation of products in applications beyond the intended use or capability of the product. To avoid problems, make sure you consult with ARC on the specifications and intended use before you make your purchase.